


WIRING DIAGRAMS


CONNECTION OF SELF-CONTAINED LUMINAIRES

K1 – K2 – K9 (lighting)




* function of the lamp in standby state,
remote switching

K9 (signage)




CONNECTION CENTRALLY SUPPLIED LUMINAIRES

K2 – K9




SET UP OF NON-MAINTAINED OR MAINTAINED OPERATION

K1 – K2 – K9

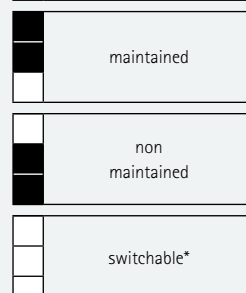


ETAP SAFETY MANAGER (ESM): WIRED / WIRELESS


BUS connection
luminaire

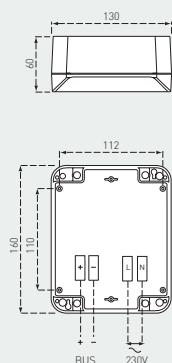Coordinator wireless
communication


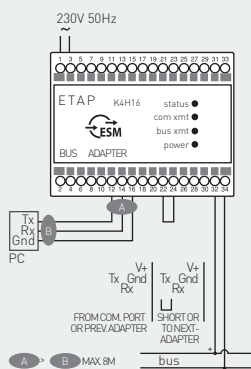
Volt-free contact

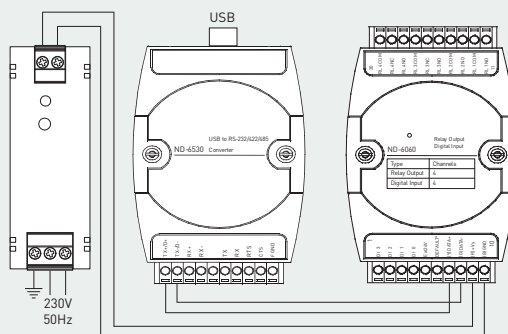


BUS power supply K4H12




BUS adapter K4H16



Connecting multiple BUS adapters

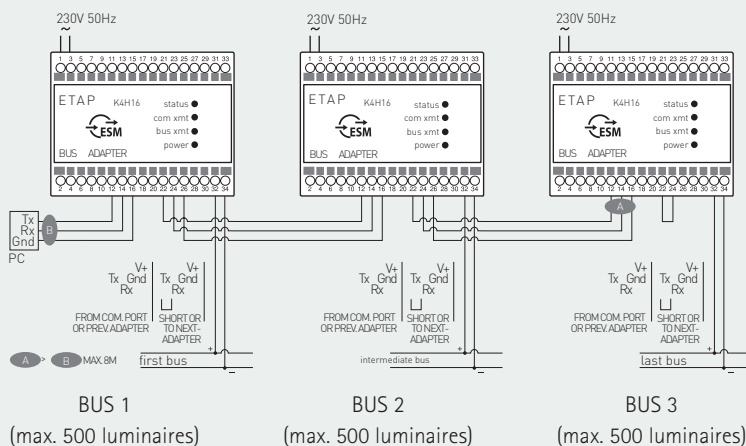

Com - Server

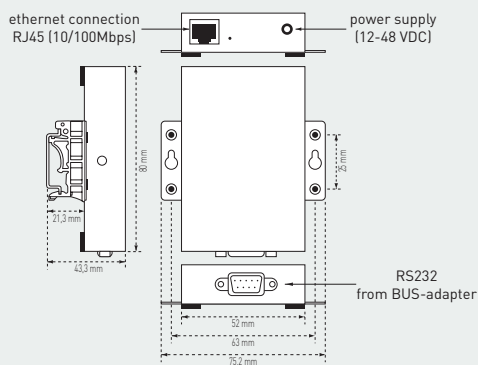

EUG

