



webref. SU5021B1



webref. SUM11A11

DYNAMISCH LICHT

ETAP-armaturen

Inclusief lampen

INBOUWARMATUREN

tabelverklaring p 221

	module	lamptype	L x B x H mm	schets nr.	lucht cm ²	bestelcode
U5						
Vierkant						
Standard reflector – gesatineerd aluminium – EQUILUM®						
T5 - ø 16mm (3000K + 6500K)						
65°	600	3 + 3 x 14W	596 x 596 x 96	105	78	U5861/614DD
		3 + 3 x 14W	596 x 596 x 96	105		U5862/614DD
	625	3 + 3 x 14W	625 x 625 x 96	105		U5867/614DD

Opties en toebehoren p. 12

Langwerpig

Standard reflector – gesatineerd aluminium – EQUILUM®

T5 - ø 16mm (3000K + 6500K)						
65°	-	1 + 1 x 49W	1496 x 175 x 96	147	125	U5860/249DD
		1 + 1 x 49W	1496 x 189 x 96	148		U5866/249DD
		1 + 1 x 54W	1196 x 175 x 96	147		U5860/254DD
		1 + 1 x 54W	1196 x 296 x 96	148		U5866/254DD
	300	1 + 1 x 54W	1196 x 296 x 96	149		U5861/254DD
	625	1 + 1 x 54W	1246 x 308 x 96	149		U5867/254DD
	1800	1 + 1 x 49W	1720 x 196 x 96	151	125	U5865/249DD

Opties en toebehoren p. 42

UM1

Vierkant

Diffusor – acrylaat / MesoOptics™ folie

T5 - ø 16mm (3000K + 6500K)						
	600	2 + 2 x 24 W	596 x 596 x 110	109		UM101/424DD
	625	2 + 2 x 24W	625 x 625 x 110	109		UM107/424DD

Diffusor – polycarbonaat / MesoOptics™ folie

T5 - ø 16mm (3000K + 6500K)						
	600	2 + 2 x 24 W	596 x 596 x 110	109		UM101/424DDT0
	625	2 + 2 x 24W	625 x 625 x 110	109		UM107/424DDT0

Diffusor – acrylaat / MesoOptics™ folie


T5 - ø 16mm (3000K + 6500K)						
	600	2 + 2 x 24 W	596 x 596 x 110	109		UM111/424DD
	625	2 + 2 x 24W	625 x 625 x 110	109		UM117/424DD

Diffusor – polycarbonaat / MesoOptics™ folie

T5 - ø 16mm (3000K + 6500K)						
	600	2 + 2 x 24 W	596 x 596 x 110	109		UM111/424DDT0
	625	2 + 2 x 24W	625 x 625 x 110	109		UM117/424DDT0

Opties en toebehoren p. 17

LICHTREGELING

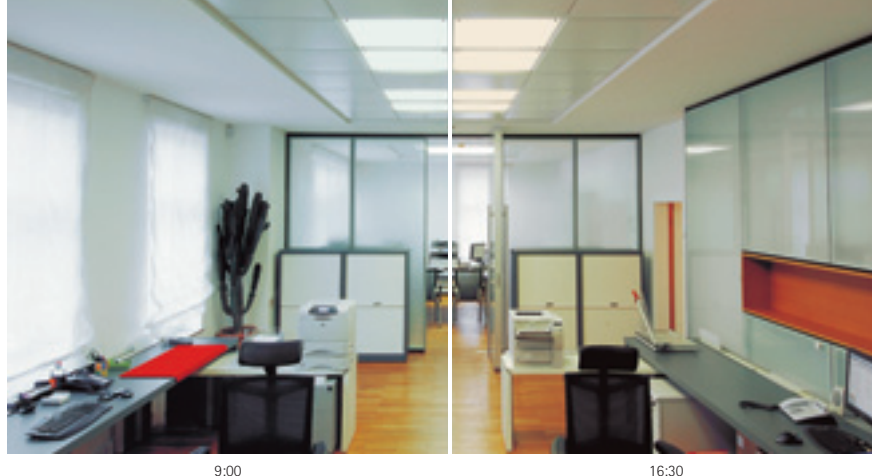

DYNAMISCH LICHT


INBOUWARMATUREN

tabelverklaring p 221

module	lamptype	L x B x H mm	schets nr.	lucht cm ²	bestelcode
Langwerpig					
Diffusor – acrylaat / MesoOptics™ folie					
	T5 – ø 16mm (3000K + 6500K)				
300	2 x 28W + 1 x 54W	1196 x 296 x 93	153		UM101/228DD
625	2 x 28W + 1 x 54W	1246 x 308 x 93	153		UM107/228DD
Diffusor – polycarbonaat / MesoOptics™ folie					
	T5 – ø 16mm (3000K + 6500K)				
300	2 x 28W + 1 x 54W	1196 x 296 x 93	153		UM101/228DDT0
625	2 x 28W + 1 x 54W	1246 x 308 x 93	153		UM107/228DDT0
Diffusor – acrylaat / MesoOptics™ folie					
	T5 – ø 16mm (3000K + 6500K)				
300	2 x 28W + 1 x 54W	1196 x 296 x 93	153		UM111/228DD
625	2 x 28W + 1 x 54W	1246 x 308 x 93	153		UM117/228DD
Diffusor – polycarbonaat / MesoOptics™ folie					
	T5 – ø 16mm (3000K + 6500K)				
300	2 x 28W + 1 x 54W	1196 x 296 x 93	153		UM111/228DDT0
625	2 x 28W + 1 x 54W	1246 x 308 x 93	153		UM117/228DDT0

Opties en toebehoren p. 47

DALLE

Diffusor – glas / polycarbonaat					
	T5 – ø 16mm (3000K + 6500K)				
600	4 + 4 x 14W	595 x 595 x 120	114		DALLE600-814BC/BFDALI
Diffusor – glas / polycarbonaat					
	T5 – ø 16mm (RGB)				
600	3 + 3 + 3 x 14W	595 x 595 x 120	114		DALLE600-914RVBDALI

Opties en toebehoren p. 23



webref. SR4013E5



webref. SR4013D1

DYNAMISCH LICHT

OPBOUW- EN PENDELARMATUREN

tabelverklaring p 221

lamptype	L x B x H mm	schets nr.	bestelcode ¹	L x B x H mm	schets nr.	bestelcode ¹
R4						
Opbouwarmaturen – individueel						
Standard reflector – gesatineerd aluminium – EQUILUM®						
T5 – ø 16mm (3000K + 6500K)						
65°	1 + 1 x 49W	1577 x 190 x 60	221	R4860/249DD	3057 x 190 x 60	222
	1 + 1 x 54W	1277 x 190 x 60	221	R4860/254DD	2457 x 190 x 60	222
Opties en toebehoren p. 83						
Opbouwarmaturen – gekoppeld – recht						
doorvoerbedrading (5 x 1,5 mm²) is standaard inbegrepen						
Standard reflector – gesatineerd aluminium – EQUILUM®						
T5 – ø 16mm (3000K + 6500K)						
65°	1 + 1 x 49W	1529 x 190 x 60	223	R4862/249DD	1480 x 190 x 60	223
	1 + 1 x 54W	1229 x 190 x 60	223	R4862/254DD	1180 x 190 x 60	223
Opties en toebehoren p. 83						
Opbouwarmaturen – gekoppeld – onder hoek						
doorvoerbedrading (5 x 1,5 mm²) is standaard inbegrepen						
Standard reflector – gesatineerd aluminium – EQUILUM®						
T5 – ø 16mm (3000K + 6500K)						
65°	1 + 1 x 49W	1529 x 190 x 60	224	R4866/249DD	1480 x 190 x 60	224
	1 + 1 x 54W	1229 x 190 x 60	224	R4866/254DD	1180 x 190 x 60	224
Opties en toebehoren p. 83						
Pendelarmaturen – individueel						
Standard reflector – gesatineerd aluminium – EQUILUM®						
T5 – ø 16mm (3000K + 6500K)						
65°	1 + 1 x 49W	1577 x 190 x 60	225	R4861/249DD	3057 x 190 x 60	226
	1 + 1 x 54W	1277 x 190 x 60	225	R4861/254DD	2457 x 190 x 60	226
Standard reflector – gesatineerd aluminium – EQUILUM® – schakelbare up en downlight – RAL 9006 aluminiumwit						
T5 – ø 16mm (3000K + 6500K)						
60°	1 + 2 x 28W	1345 x 250 x 60	227	R4901/328DDX2		
Opties en toebehoren p. 83						
Pendelarmaturen – gekoppeld – recht						
doorvoerbedrading (5 x 1,5 mm²) is standaard inbegrepen						
Standard reflector – gesatineerd aluminium – EQUILUM®						
T5 – ø 16mm (3000K + 6500K)						
65°	1 + 1 x 49W	1529 x 190 x 60	228	R4863/249DD	1480 x 190 x 60	228
	1 + 1 x 54W	1229 x 190 x 60	228	R4863/254DD	1180 x 190 x 60	228
Opties en toebehoren p. 83						
Pendelarmaturen – gekoppeld – onder hoek						
doorvoerbedrading (5 x 1,5 mm²) is standaard inbegrepen						
Standard reflector – gesatineerd aluminium – EQUILUM®						
T5 – ø 16mm (3000K + 6500K)						
65°	1 + 1 x 49W	1529 x 190 x 60	229	R4867/249DD	1480 x 190 x 60	229
	1 + 1 x 54W	1229 x 190 x 60	229	R4867/254DD	1180 x 190 x 60	229
Opties en toebehoren p. 83						

¹ code + X1: armatuur in RAL9003-wit / code + X2: volledige armatuur in RAL9006-aluminiumwit